


OEIRTDC-3G-PD

Standard optical electrical receiver

- Standard OE converter
- High end frequency ; 3GHz
- High-tracability of re-production
- Frequency flat response
- Optional battery drive
- SMF-SC super PC interface

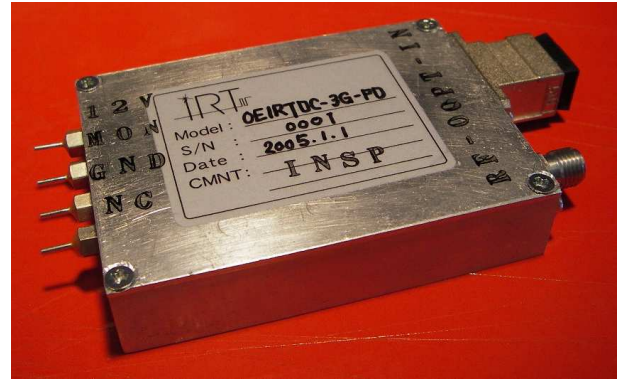

Electrical specification

Bandwidth	DC to 3GHz
Gain ripple re-production	
	(DC to 2GHz) +/-0.15dB
	(DC to 3GHz) +/-0.5dB
Output return loss	<-10dB
Operating temperature range	5deg to +45deg
Supply voltage	+12V/1mA
ORL	under -40dB
Sensitivity	0.80A/W(1310nm)
	0.80A/W(1510nm)
Dimensions	45mm X 62mm X 16mm

